


DB Straight 0m50 - Breaker

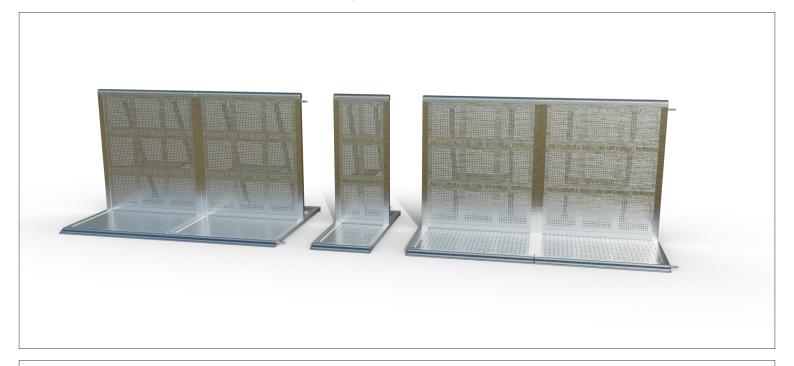

Dutch Barrier's Straight 0m50 – Breaker is designed for quick and flexible setup changes at multi-day events, where barrier lines may need to be adapted overnight. Because it has no pin, this 0m50 section can be slid in and out of the barrier line once unbolted, allowing easy layout changes without compromising strength or alignment. Its orange step provides clear visual recognition for crew during operation.

- a state of the art aluminium barrier system, built for fast setup and optimised crowd control solutions -

About

Dutch Barrier's founders and partners boast over 50 years of experience in high-end manufacturing, layout design, and crowd control solutions. We saw an opportunity to start afresh with an entirely new stage barrier design, preserving the best features and improving upon them where possible.

Why

We believe in quality, safety, and creating an unforgettable experience. The safer an audience is, the more comfortable it will feel at your event.

How

We achieve quality and safety by leveraging 50-plus years of combined original creators' experience to reinvent the to date world's best barrier system from the ground up, making it accessible to anyone who might be in the market for such a system, either to rent or to buy.

What

Dutch Barrier® is a state-of-the-art lightweight aluminium barrier system offering an innovative combination of straights, special sections and storage solutions. Create ingenious crowd control solutions, enjoy quick setups and enhanced handling, and benefit from an equal footprint for every dolly during transport or storage.

Oh, and there's one more thing...

Dutch Barrier® is not just a brand. It's a state-of-the-art engineering company where customer support is an integral part of the mission rather than being hidden behind the impersonality of an online promise.


More information: info@dutchbarrier.nl Rental & Sales: info@duchtbarrier.services









DB Straight 0m50 - Breaker

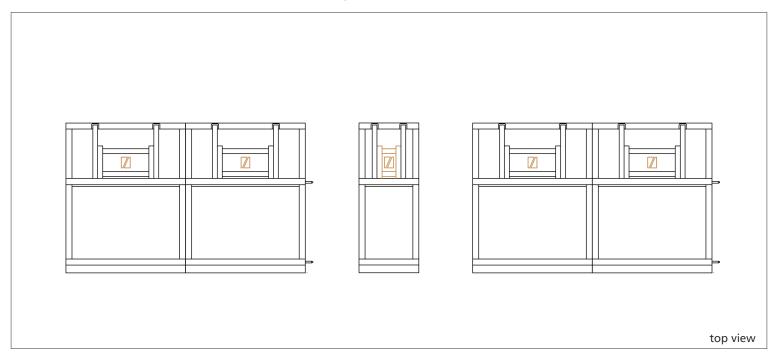

Testing of the DB Straight 0m50 – Breaker was conducted at a minimum of 5kN/m pressure at the top rail, following and exceeding the Temporary Demountable Structures Edition 4 guidelines by the Institution of Structural Engineers (ISE). TÜV reports for each test are available upon request at Dutch Barrier & Dutch Barrier Services.

- a state of the art aluminium barrier system, built for fast setup and optimised crowd control solutions -





Technical Specs

- A solid (foldable) A-frame welded aluminium construction made out of bespoke extrusion profiles
- One unit measures 500mm wide, 1250mm deep and 1200mm high
- A rounded top rail and welded end caps for the audience's comfort & and safety
- A punched tread plate prevents liquids from pooling
- An elevated rear step gives security personnel better visibility and makes lifting people in distress over the barrier easier
- Clever design enables handling without the risk of trapped fingers
- Internal solid blocks allow for added strength and easy insertion of bolts, as well as an improved lifespan of the whole unit
- Locking lips maintain the unit's upright stability in unbolted condition
- Slides over the top pin horizontally and over the bottom pin vertically for precise alignment as well as easy removal from completed barrier lines
- Straight 0m50 Breaker sections interconnect at the bottom and top on either side by one standard Dutch Barrier bolt
- Also available with black upright, braces and step
- Weight 22,6kg
- Use in high crowd pressure areas: •••• 5/5