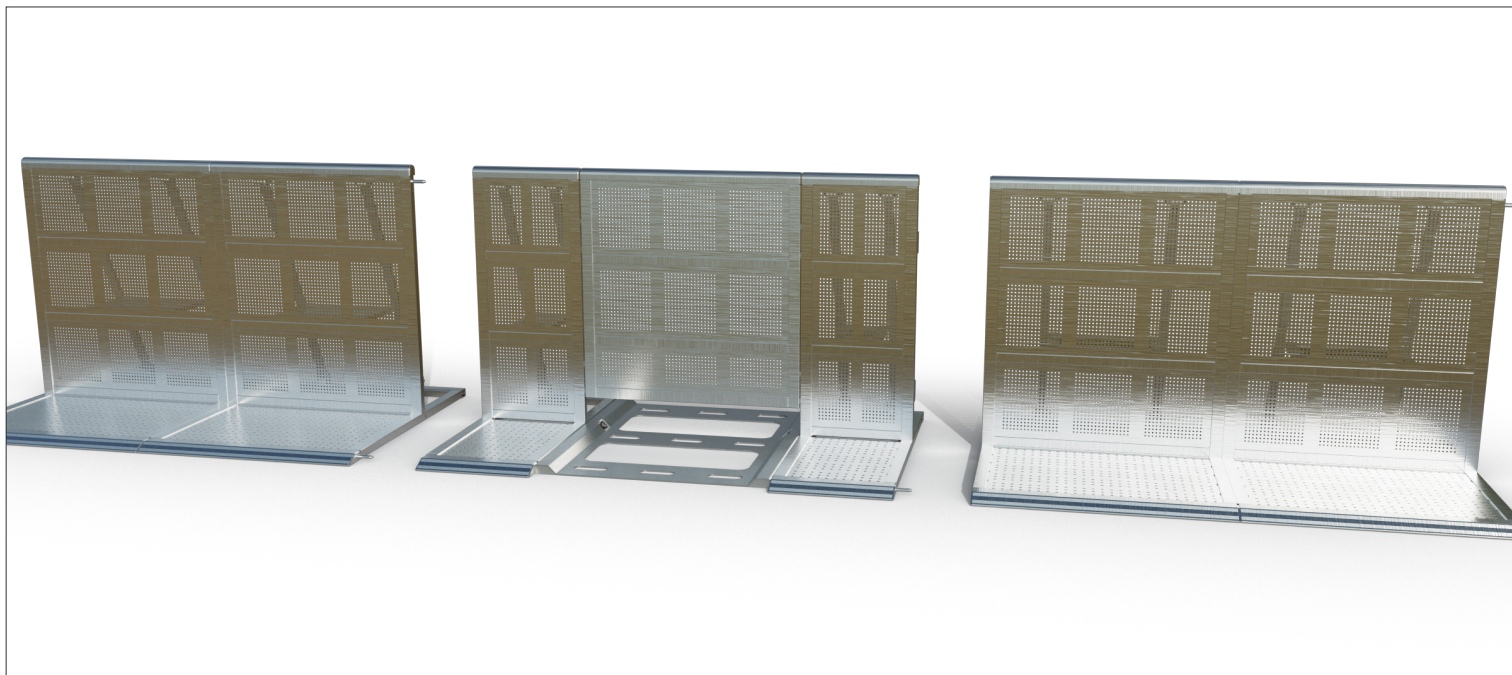


DB Cable Gate 1m00 (set)

Dutch Barrier's Cable Gate (sets) are available in 1m00 and 1m50 gate widths. They consist of two half sections, a treadplate and a removable upright. Tested under the same conditions as the straight section, they provide a rock-solid crowd control solution needing a cable run. When running cables or cable ramps, simply take out the entire front or swivel it to either side.

- a state of the art aluminium barrier system, built for fast setup and optimised crowd control solutions -

About

Dutch Barrier's founders and partners boast over 50 years of experience in high-end manufacturing, layout design, and crowd control solutions. We saw an opportunity to start afresh with an entirely new stage barrier design, preserving the best features and improving upon them where possible.

Why

We believe in quality, safety, and creating an unforgettable experience. The safer an audience is, the more comfortable it will feel at your event.

How

We achieve quality and safety by leveraging 50-plus years of combined original creators' experience to reinvent the to date world's best barrier system from the ground up, making it accessible to anyone who might be in the market for such a system, either to rent or to buy.

What



Dutch Barrier® is a state-of-the-art lightweight aluminium barrier system offering an innovative combination of straights, special sections and storage solutions. Create ingenious crowd control solutions, enjoy quick setups and enhanced handling, and benefit from an equal footprint for every dolly during transport or storage.

Oh, and there's one more thing...

Dutch Barrier® is not just a brand. It's a state-of-the-art engineering company where customer support is an integral part of the mission rather than being hidden behind the impersonality of an online promise.


More information: info@dutchbarrier.nl

Rental & Sales: info@dutchbarrier.services

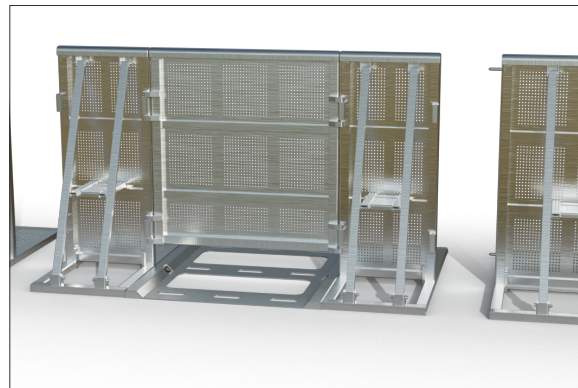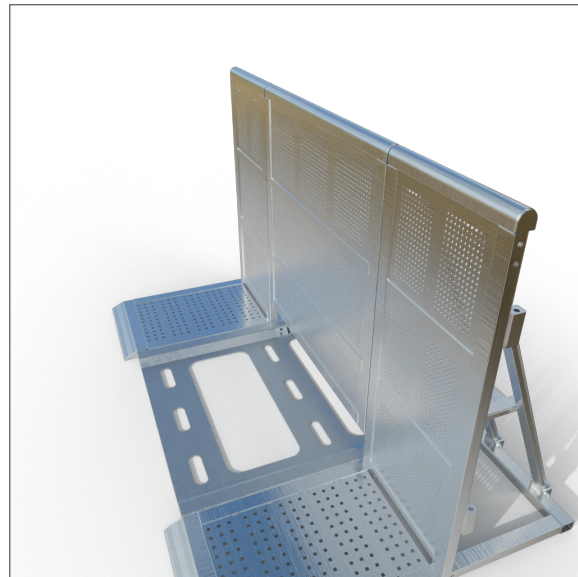



- a safe show for every row -

DB Cable Gate 1m00 (set)

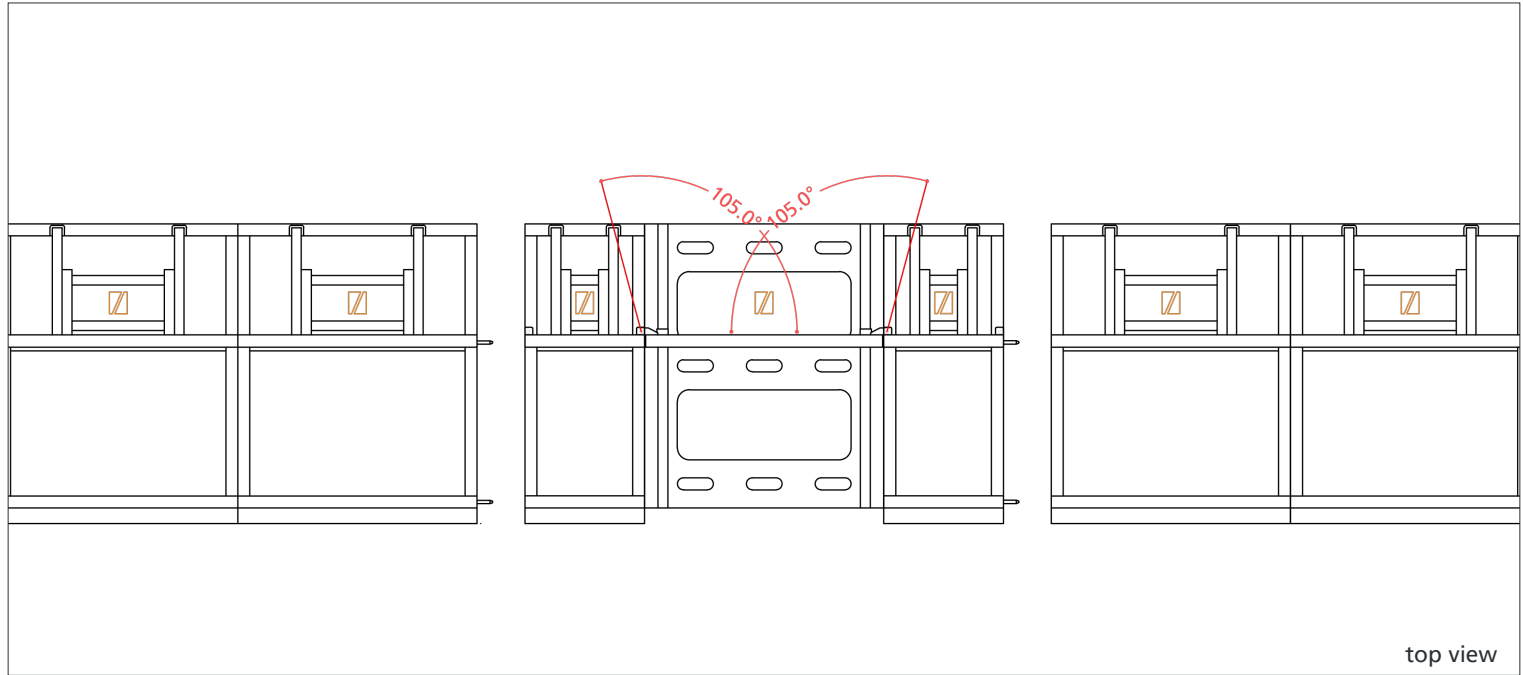

Testing was done at a minimum of 5kN/m pressure at the top rail, following and exceeding the Temporary Demountable Structures Edition 4 guidelines by the Institution of Structural Engineers (ISE). TUV reports for each test are available at Dutch Barrier & Dutch Barrier Services upon request.

- a state of the art aluminium barrier system, built for fast setup and optimised crowd control solutions -

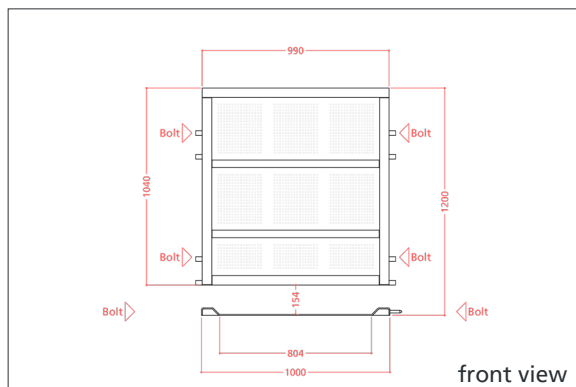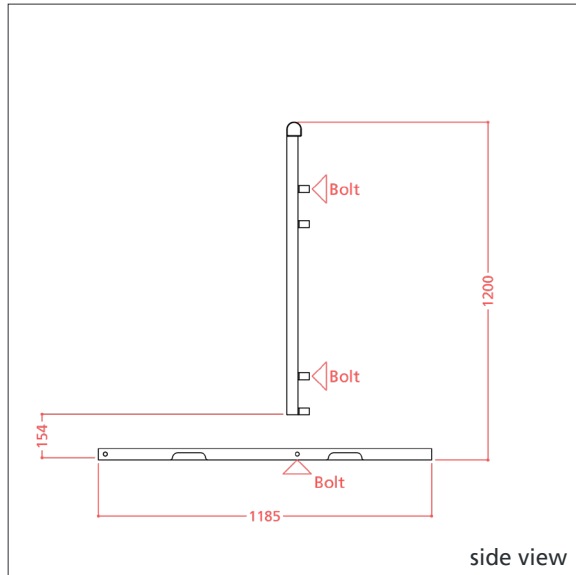

Technical Specs

- A welded galvanized steel floor and aluminium upright with four heavy-duty hinges in between two straight half sections
- Straight half section specs are provided on a separate sheet
- A treadplate measures 1000mm wide and 1185mm deep, the upright measures 990mm wide and 1040mm high
- One set measures 2000mm wide, 1250mm deep and 1200mm high
- A rounded top rail and welded end caps for the audience's comfort & and safety
- Bottom pin provides for easy setup and alignment
- The upright connects to the hinges by four standard Dutch Barrier bolts. During setup, the crew may take out the upright completely or swivel it to either side
- The treadplate interconnects at the bottom on either side by one standard Dutch Barrier bolt
- Also available with black upright
- Weights: Floor 29,0kg, upright 15,8kg, half meter straight 24,0kg
- Stored and travel per 4 complete sets in a bespoke stainless steel dolly
- Use in high crowd pressure areas: ●●●●● 5/5

- a safe show for every row -